



Install N1241-1 alternator/N3208 Regulator per diagrams on pages 1 and 2.

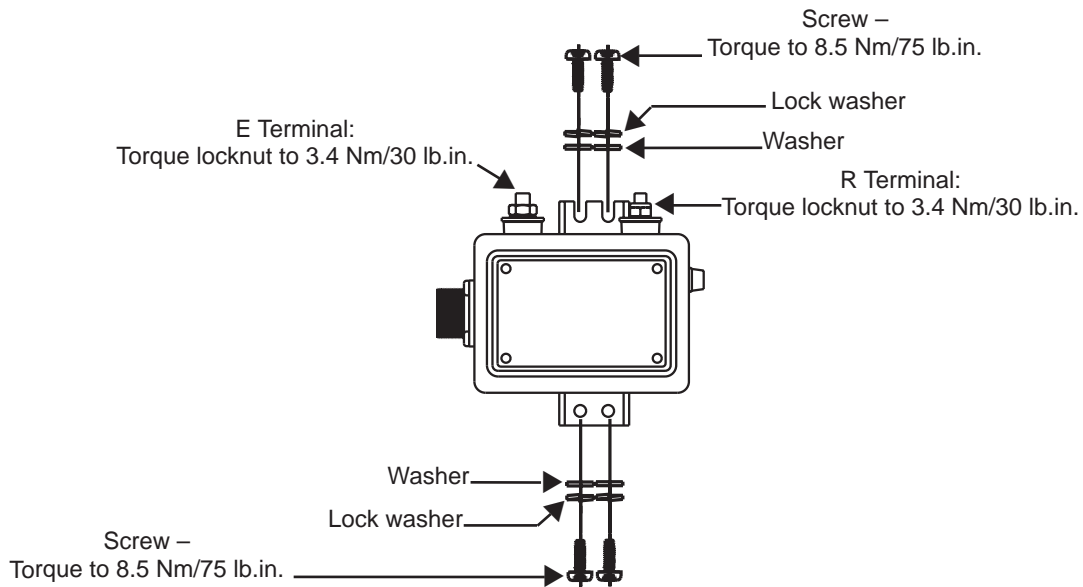


Figure 1a – N3208 Regulator Wiring Connections

Top Mounting Bolt on alternator,
3/8 SAE Grade 5 min.;
torque to 28 Nm / 20 lb. ft.

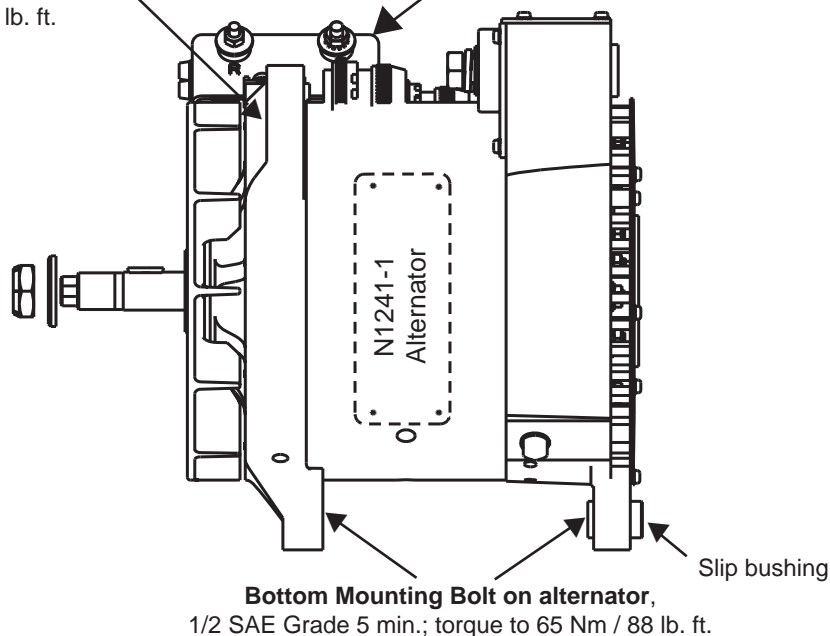


Figure 1– N1241-1 Alternator

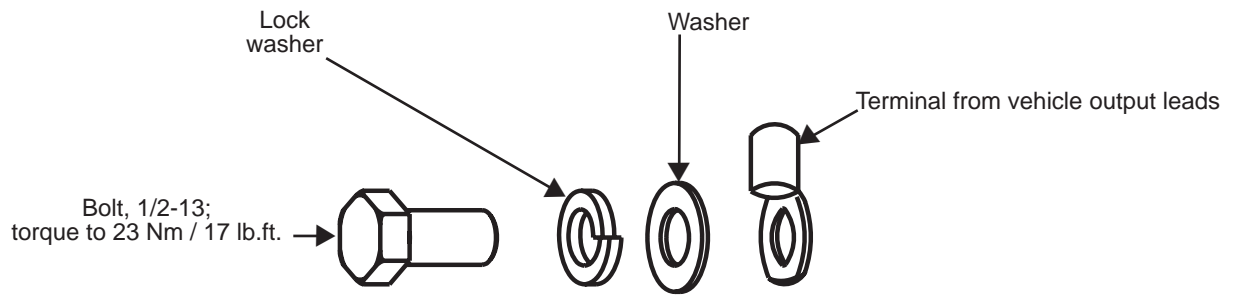


Figure 1b – 28 V or 14 V B+ Terminal Stacking Order

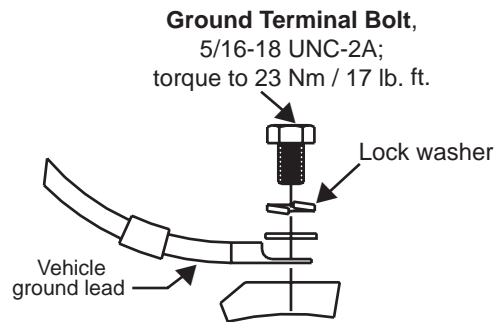
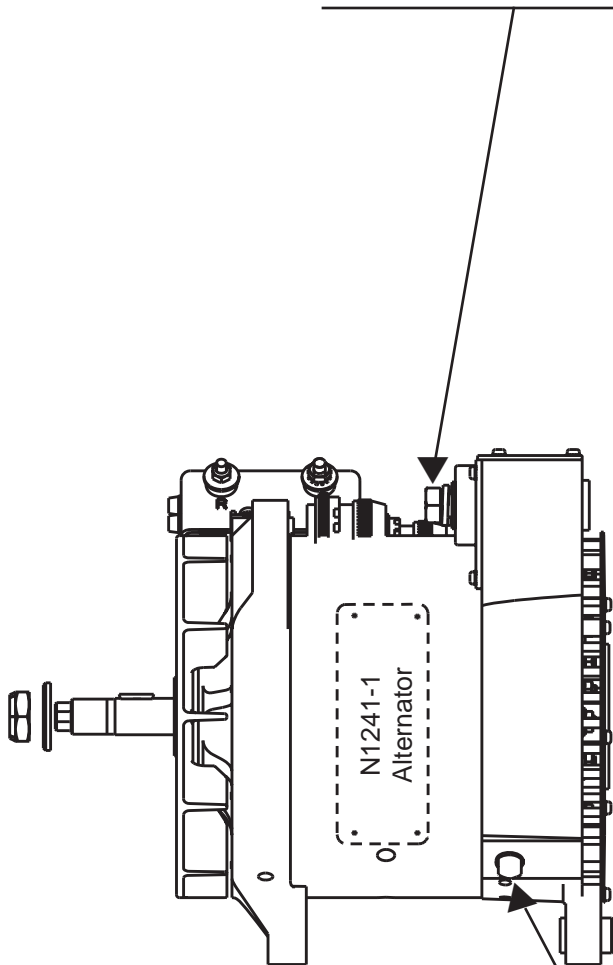


Figure 1c – Ground Terminal Stacking Order